


28-03802

NO	DESCRIPTION	DATE	BY
A	MEC 06045	07/28/06	DW

## TOP MOUNTING DIMENSIONS FOR MODEL NO. 3T-3700, 3L-3800

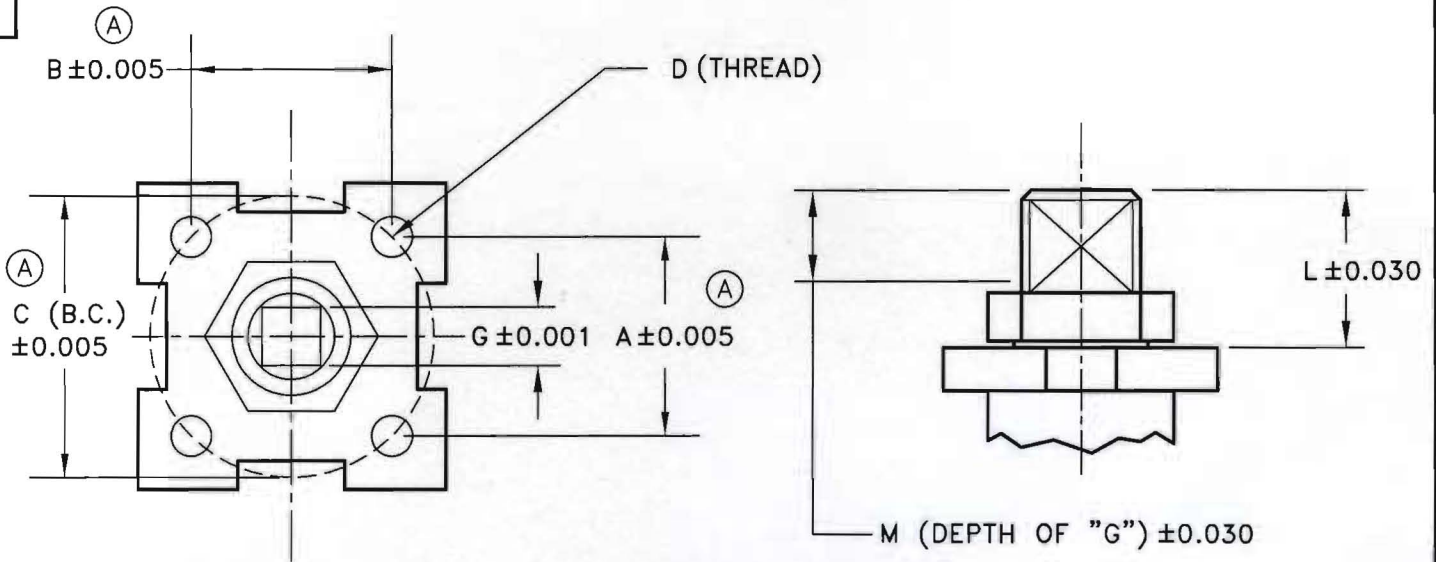

- A, B & C (B.C.) = MOUNTING PAD SPACING
- D = THREAD OF MOUNTING HOLES
- G = ACROSS FLAT ON STEM
- L = DISTANCE TO TOP OF STEM FROM MOUNTING PAD

VALVE SIZE	DIMENSIONS (INCHES)							
	A	B	C (B.C.)	D (THREAD)	MTG PATTERN	G	L	M
1/4"-1/2"	1.168	1.168	∅1.65	M5	F04	0.354	0.433	0.25
3/4"	1.392	1.392	∅1.97	M6	F05	0.434	0.512	0.31
1"-1 1/4"	1.392	1.392	∅1.97	M6	F05	0.434	0.75	0.49
1 1/2"	1.952	1.952	∅2.76	M8	F07	0.434	0.93	0.62
2"	1.952	1.952	∅2.76	M8	F07	0.551	0.96	0.62

**MARWIN**  
Ball Valves

RICHARDS INDUSTRIES  
3170 Wasson Rd.  
Cincinnati, Ohio 45209  
Telephone (513) 533-5600  
Fax (513) 533-7343

DR. BY	DW	03/23/05
CHK. BY		

28-03802