


TOL. UNLESS OTHERWISE NOTED (IN.)

VA. END-TO-END LENGTH: $\pm \frac{1}{16}''$
 OTHER VA. DIM.: $\leq \text{NPS } 2''$, $\pm \frac{1}{8}''$;
 NPS $2 \frac{1}{2}'' \sim 4''$, $\pm \frac{1}{4}''$; $> 4''$, $\pm \frac{1}{2}''$
 VA.-ACT. ASSY & PIPING DIM.: $\pm \frac{1}{2}''$

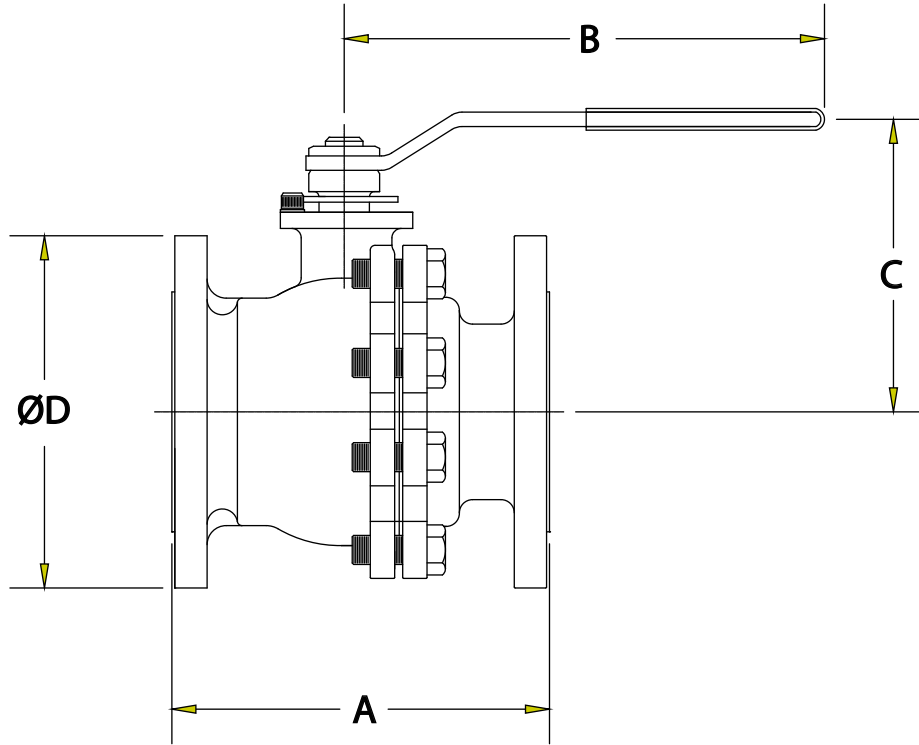

SIZE	DIMENSIONS IN INCHES				WT. (LBS.)
	A	B	C	ØD	
1"	6.50	6.50	3.86	4.88	10.1
1 1/2"	7.50	7.87	4.69	6.12	18.9
2"	8.50	7.87	5.04	6.50	23.7
2 1/2"	9.50	9.84	6.38	7.50	41.5
3"	11.12	9.84	6.77	8.25	62.8
4"	12.00	11.81	7.76	10.00	98.1
6"	15.50	31.50	11.06	12.50	218.0

CUSTOMER ORDER # _____
 CUSTOMER _____
 TAG No. _____
 SIZE & MODEL # 1"-6" 2000F-F3 SERIES VALVE
FULL PORT WITH 300# ANSI FLANGED ENDS
 CERTIFIED _____ DATE _____



a division of Richards Industries

CINCINNATI, OHIO U.S.A

www.marwinvalve.com

DR. BY DW 08/08/06

CHK. BY

MD02003